

Mod. K20M

Trailer for monitors approved according to the Highway Code, category O1

Standard characteristics

Trailer material: Hot dip galvanized carbon steel

Typology: Single-axle trailer

Hose boxes (For hoses, see dedicated page)

Parking brake device with lever

Flanged connection for monitor

Front working deck

Electrical System, 12 or 24 V in accordance with the Highway Code


Automotive standard connection

Feeding: Double way with internal clapet

Coating: Epoxy Primer + Polyuretanic red coat RAL3000, Total DFT >120 µm

Empty weight: 290 Kg

Approvals

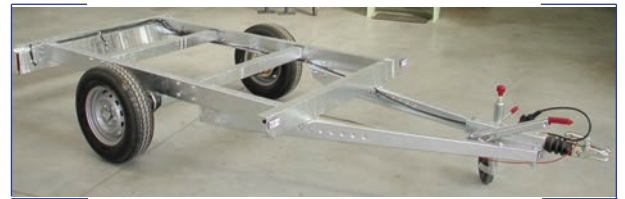

Notes

In case of inquiry and/or order specify the following datas:

> Type of monitor, hose lenght, feeding connection type


Available on Demand

> Feeding: Triple way feeding

> Coating: Other painting cycles

Compatible monitors

> MB3, MB4, DOC, MKW, MKL, MKDB

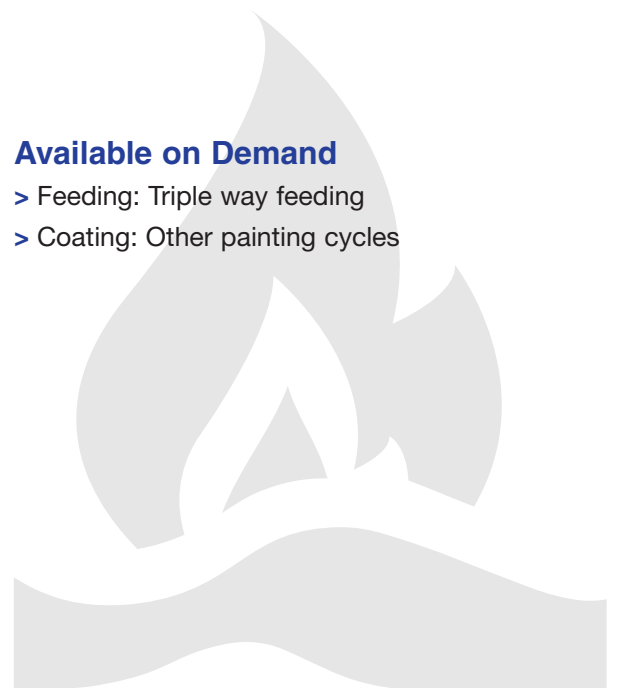

www.fasspa.net

Mod. K20M

Trailer for monitors approved according to the Highway Code, category O1

Layout & Overall Dimension

