



Mod. LD10

Water/Foam nozzle for "Water / foam spray" systems and for loading truck area protection

Standard characteristics

Flow rate: From 50 to 220 at 5 barg

Body and net material: Stainless steel

Nozzle material: Brass

Spray angle: 90°

Connection type: Threaded 3/4" BSP F

Final coating: Natural

Weight: ~ 1 Kg

Approvals



Notes

In case of inquiry and/or order specify the following datas:

> Required flow rate

Available on Demand

> Inlet threaded 1/2" NPT M




www.fasspa.net



Mod. LD10

Water/Foam nozzle for "Water / foam spray" systems and for loading truck area protection

Layout & Overall Dimension

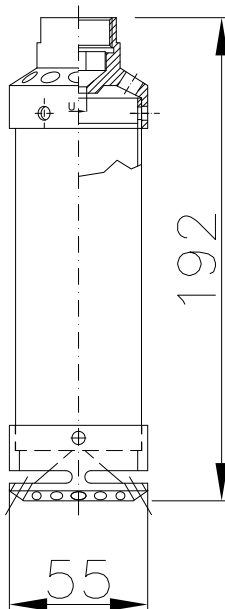

Typical Application



www.fasspa.net