

Mod. MINI-GN

Water/Foam nozzle made in bronze or aluminium

Standard characteristics

Nominal flow rate: From 400 to 700 lpm calculated at 5 barg

Body material: Aluminium or Bronze

Actuation: Manual

Jet Type: Fog, Full (Jet)

Horizontal throw and covering angle: See diagram on next page

Base flange made in carbon steel: External diameter Ø160 mm

Coating: Epoxy Primer + Polyurethane red coat RAL3000,
Total DFT >120 µm

Weight: ~4 Kg

Approvals



Notes

In case of inquiry and/or order specify the following datas:

- > Working pressure

Compatible monitors

- > MB3, MKW, MKL, MKP

Available on Demand

- > Base Flange: Other Material
- > Other Inlet connection with adapter (NH, Ghost, Storz)
- > Coating: Other painting cycles

www.fasspa.net

Mod. MINI-GN

Water/Foam nozzle made in bronze or aluminium

Layout & Overall Dimension

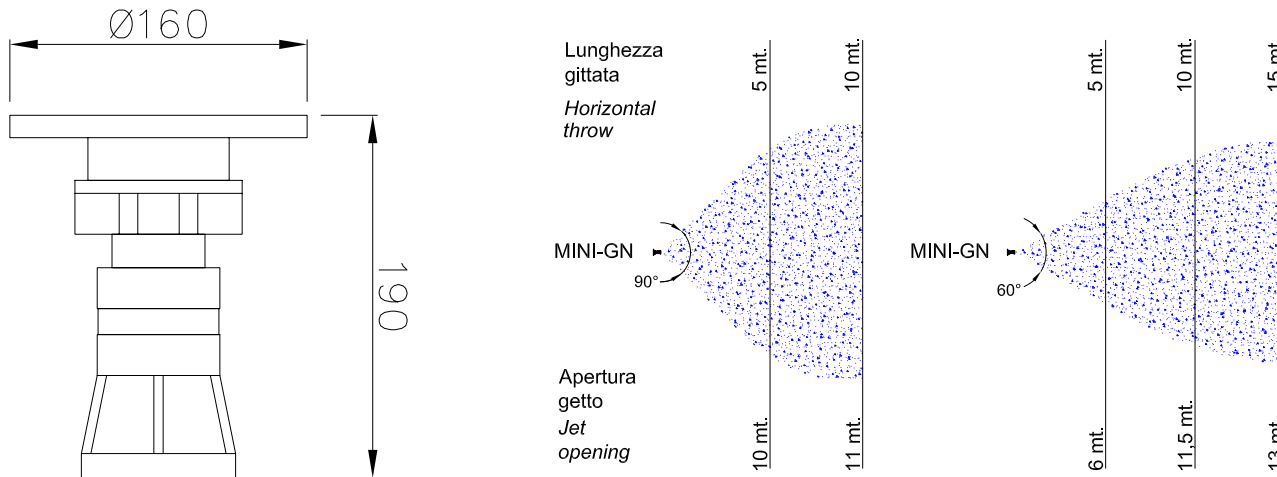


Grafico di gittata - Horizontal throw diagram
Bocchello - Nozzle MINI GN
Gittate a getto nebulizzato - Fog jet horizontal throw
 Elevazione bocchello - Nozzle elevation $20^\circ \pm 30^\circ$


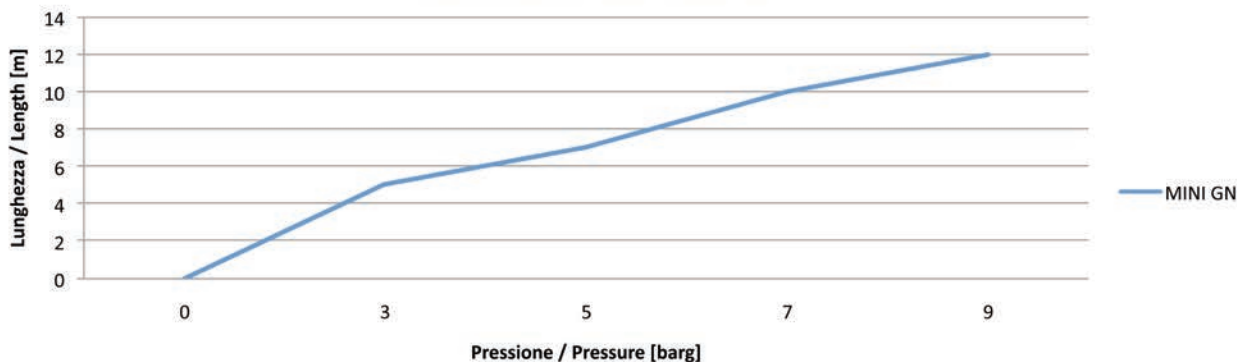


Grafico di gittata - Horizontal throw diagram
Bocchello - Nozzle MINI GN
Gittate a getto pieno - Fog jet horizontal throw
 Elevazione bocchello - Nozzle elevation $20^\circ \pm 30^\circ$

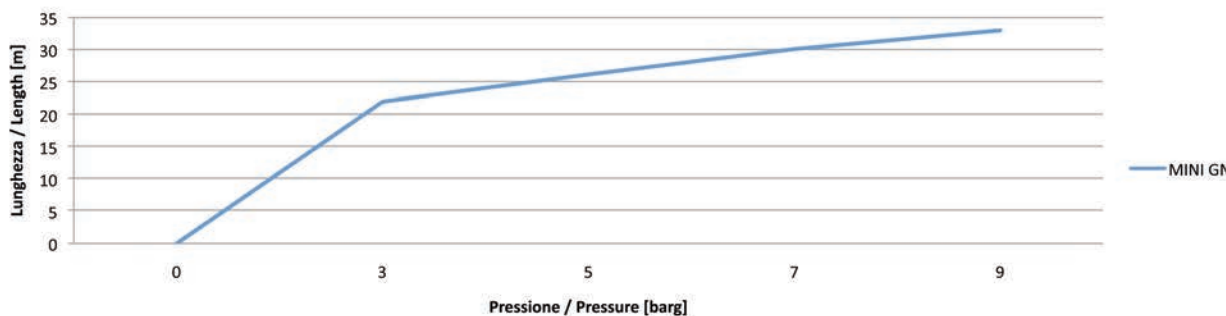

Test in still air, throw length dependent on flow rate and pressure at the nozzle

www.fasspa.net