

Mod. NHF

High expansion foam generator dynamic type BV & TUV Approved to be installed in enclosed spaces with presence of hot air and pollution, according to UNI EN 13565

Standard characteristics

Flow Rate: NHF-2= 200 l/1' at 4 Barg

NHF-4= 400 l/1' 4 Barg

Body material: Stainless steel AISI 304

Nozzles material: Brass

Turbine material: Aluminium and brass

Fan material: Synthetic high resistance

Connection: 2" BSP M


Coating: Pickling and electropolishing

Weight: ~ 43 Kg

Expansion ratio: According to EU EN -13565 -1 and NFPA 11 rules



Approvals

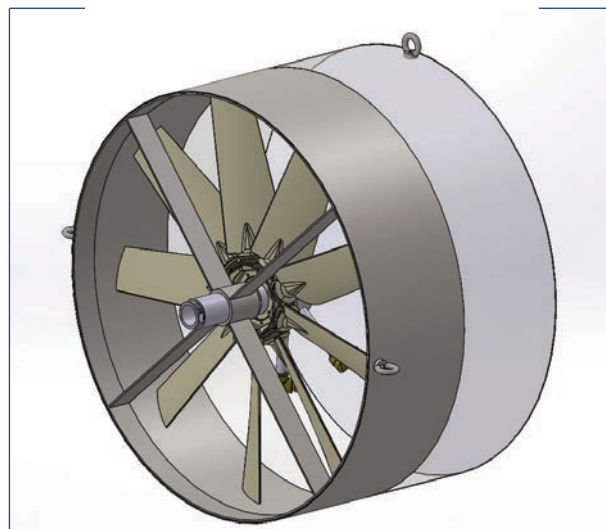

Notes

In case of inquiry and/or order specify the following datas:

- > Body material, Connection type, Flow rate

Optional

- > Support for floor installation
- > Interception gate valve

Available on Demand

- > Execution in self-induction version, with connected 100 lt foam tank
- > Flanged connection
- > Body material in stainless steel 316
- > Coating: Other painting cycles

www.fasspa.net

Mod. NHF

High expansion foam generator dynamic type BV & TUV Approved to be installed in enclosed spaces with presence of hot air and pollution, according to UNI EN 13565

Layout & Overall Dimension

