



MONITOR MKW

Manual monitor controlled by double handwheel

Standard characteristics

Body Size: 3", 4", 6", 8"

Maximum Body Flow Rate: for 3": Max. 6000l/m
for 4": Max. 8600l/m
for 6": Max. 20000l/m
for 8": Max. 30000l/m

Pressure Loss: See diagram ΔP Vs Flow rate

Flow rate: On customer Request link to compatible nozzles or branchpipes

Flow rate recommended: See diagram Pressure Loss Vs Flow Rate

Recommended maximum pressure loss: 1,2 barg

Rotation with handwheel: 360° continuous

Elevation and deflection with handwheel: ~ +90° - 85°

Horizontal throw: See dedicated page on compatible nozzles or branchpipes

Test Pressure: 27 barg - **Custom. req.** Up to 48 barg

Base Flange: Carbon Steel

Outlet Flange: External diameter $\varnothing 160$ mm or $\varnothing 240$ mm

Coating: Epoxy Primer + Polyurethane red coat RAL3000, Total DFT >120 μ m

Weight: for 3": ~ 30 Kg
for 4": ~ 40 Kg
for 6": ~ 90 Kg
for 8": ~ 150 Kg

Optional

- > Pressure gauge on outlet
- > Drain Valve

Compatible Nozzles Or Branchpipes

- > Foam and self inducing foam branchpipes mod. LS and LSA
- > Water branchpipe mod. LA
- > Jet spray nozzles mod. Mini GN - GN - Super GN
- > Jet spray self inducing nozzles mod. GNA & Super GNA

Approvals



Available on Demand

- > Base Flange: Other material
- > Outlet Flange: Other outlet connection with adapter (NH, Ghost, Storz)
- > Coating: Other painting cycles

Key configuration


- > Application for electrical handling
- > Application for oil - hydraulic handling

www.fasspa.net

MONITOR MKW

Manual monitor controlled by double handwheel

Layout & Overall Dimension - MKW Monitor

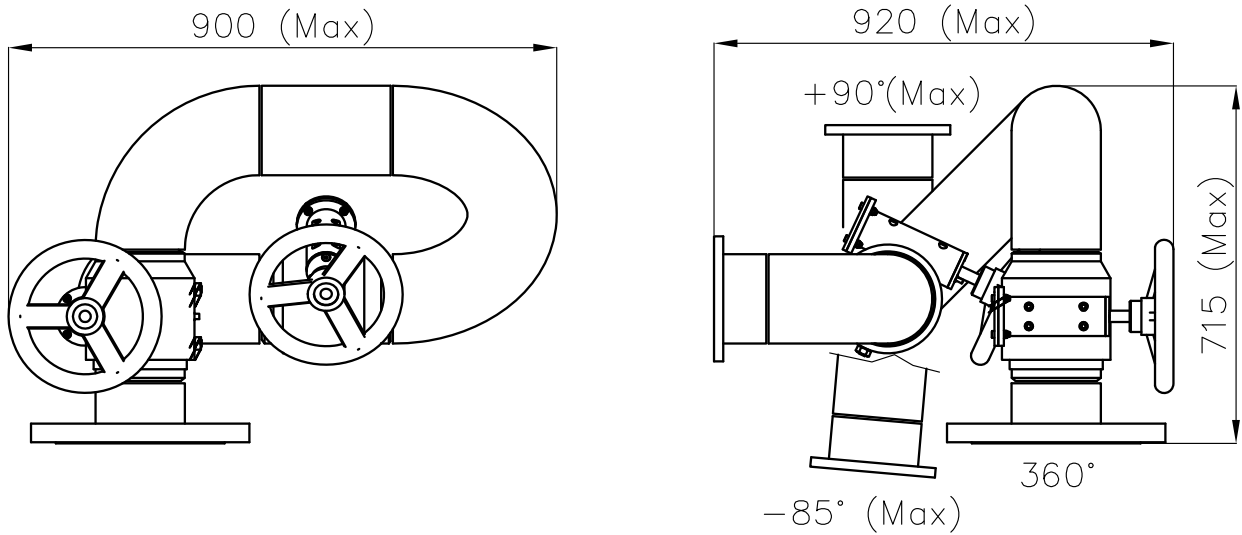

Pressure Loss ΔP Vs Flow rate

